

MBNT Automatic Butt Splicer



- Non-stop unwinding for label converting, flexible packaging and narrow web applications
- Precision rolling shear splice unit for clean cut-off and tight splices

TYPICAL SPECIFICATIONS*

Maximum Splicing Speed	to 800 FPM	240 MPM
Maximum Web Width	to 26 IN	660 MM
Maximum Roll Diameter	to 50 IN	1270 MM

* As with all Martin products, this model is application-engineered to the process. Consult Martin Automatic Inc for more information.

STS Automatic Splicer



- Compact non-stop unwind for narrow web applications
- Splice unit for taped butt and taped overlap splices

TYPICAL SPECIFICATIONS*

Maximum Splicing Speed	to 500 FPM	150 MPM
Maximum Web Width	to 13 IN	330 MM
Maximum Roll Diameter	to 31.5 IN	800 MM

* As with all Martin products, this model is application-engineered to the process. Consult Martin Automatic Inc for more information.



MLS Automatic Splicer

- Compact design, ideal for mounting above press or process
- Pull-out spindles and splice unit for ergonomic roll loading and splice preparation
- Pneumatic spindle chucking
- Ability to load two full-diameter rolls
- Taped overlap splice with no leading or trailing edge when 2 in (50 mm) tape is used.
- Martin inertia-compensated tension control system
- Manually operated running roll sidelay
- Martin standard PLC control system
- Integrated web guide (optional)

TYPICAL SPECIFICATIONS*

Maximum Splicing Speed	to 500 FPM	150 MPM
Maximum Web Width	to 20 IN	508 MM
Maximum Roll Diameter	to 24 IN	610 MM

* As with all Martin products, this model is application-engineered to the process. Consult Martin Automatic Inc for more information.

High Performance Splicing, Rewinding and Tension Control Systems
www.martinautomatic.com

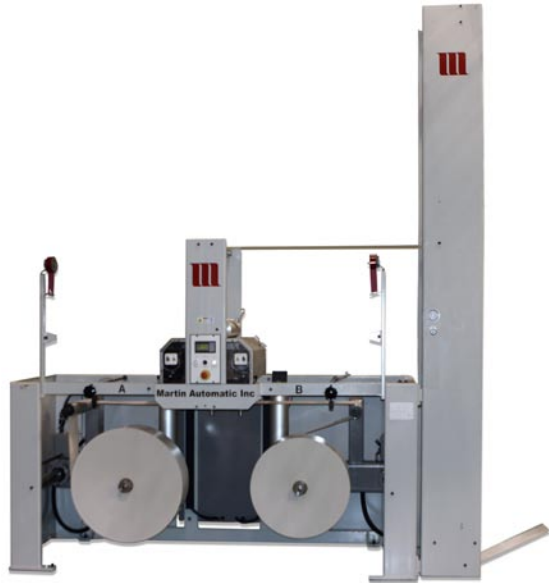

Martin Automatic Inc



Non-Stop Roll Changing Solutions for Label and Narrow Web

The benefits of automatic splicing add up to significantly increased productivity, greater quality control and reduced waste. Martin Automatic Inc applies these benefits to label converting and narrow web applications.

 **Martin Automatic Inc**
Martin Engineers Solutions



MBS Automatic Butt Splicer

- Non-stop unwinding for label converting and narrow web applications
- Versatile design for films, laminates, paperboard and other materials
- Patented lift-and-load roll loading
- Capacity for two full-diameter rolls at any time
- Reliable rolling shear splice unit for clean cut-off and tight splices
- Martin inertia-compensated tension control system
- Available waste reduction system
- Available in-register splicing for pre-printed webs

TYPICAL SPECIFICATIONS*

Maximum Splicing Speed	to 1000 FPM	305 MPM
Maximum Web Width	to 26 IN	660 MM
Maximum Roll Diameter	to 50 IN	1270 MM

* As with all Martin products, this model is application-engineered to the process. Consult Martin Automatic Inc for more information.



LRD Automatic Transfer Rewind

- Two-spindle automatic winder for label, flexible packaging and narrow to mid-web processes
- Automatic unloading of finished rolls
- Versatile design for films, laminates, papers and other materials
- Programmable taper tension control
- Available guiding, slitting and ribbon separation system

TYPICAL SPECIFICATIONS*

Maximum Transfer Speed	to 1000 FPM	305 MPM
Maximum Web Width	to 32 IN	813 MM
Maximum Roll Diameter	to 50 IN	1270 MM

* As with all Martin products, this model is application-engineered to the process. Consult Martin Automatic Inc for more information.



MBSC Automatic Butt Splicer

- Non-stop unwinding for label converting, flexible packaging and narrow web applications
- Patented lift-and-load roll loading
- Capacity for two full-diameter rolls at any time
- Reliable patented rolling shear splice unit for clean cut-off and tight splices
- Angled butt splice taped both sides
- Automatic roll sidelay for use with opaque and transparent webs
- Martin inertia-compensated tension control system

TYPICAL SPECIFICATIONS*

Maximum Splicing Speed	to 500 FPM	150 MPM
Maximum Web Width	to 13 IN	330 MM
Maximum Roll Diameter	to 31.5 IN	800 MM

* As with all Martin products, this model is application-engineered to the process. Consult Martin Automatic Inc for more information.



STR Automatic Turret Rewind

- Compact non-stop turret rewriter for label converting and narrow web applications
- Manual pneumatic spindle chucking
- Automatic roll transfer on roll length or operator signal
- Festoon with pneumatically adjustable tension
- Operator adjustable winding profile setting, with diameter-based torque boost feature
- Integrated web guide and lay-on roller for high quality rolls

TYPICAL SPECIFICATIONS*

Maximum Splicing Speed	to 500 FPM	150 MPM
Maximum Web Width	to 13 IN	330 MM
Maximum Roll Diameter	to 24 IN	610 MM

* As with all Martin products, this model is application-engineered to the process. Consult Martin Automatic Inc for more information.